

STORE YOUR BOARd

THANK YOU FOR YOUR PURCHASE!

WARNING!

It is the user's responsibility to ensure the safe and proper use of this product. StoreYourBoard is not responsible for damages and injuries related to installation or use, including improper or inadequate mounting. Wear eye protection and locate electrical wiring in walls prior to installation. Not intended for children.

Misuse of this product could result in serious injury or death.

PLEASE READ ALL INSTRUCTIONS BEFORE PRODUCT INSTALLATION

INCLUDES:


1 - Wall Rack

2 - Wall Lag Screws

2 - Machine Washers

WEIGHT LIMITS: 50 lbs. max per arm 100 lbs. max per unit

CHECK OUT OUR INSTALLATION VIDEO AT bit.ly/BLATFatTire

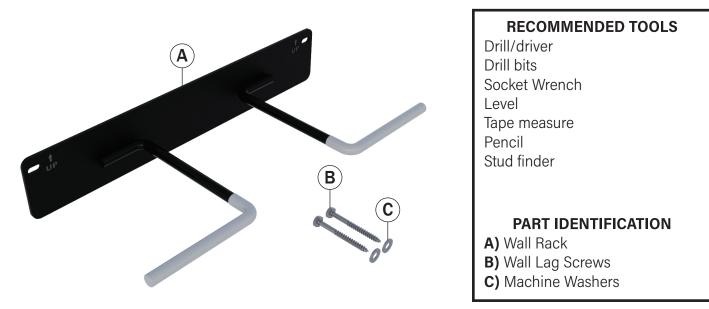

1. Use a stud finder to locate the nearest studs on the wall you wish to install the rack on. Mark each stud location with a pencil. Ensure your stud locations are roughly 16" apart.

2. Hold the rack up to the wall at the desired mounting height. Align the rack with the arrows facing up and the slots with the stud locations marked in the previous step. Use a level to ensure the rack is evenly balanced horizontally. Once balanced, mark both slot locations with a pencil.



WE HIGHLY VALUE YOUR FEEDBACK! HELP SYB AND OTHER CUSTOMERS BY LEAVING A REVIEW OF YOUR EXPERIENCE.




info@storeyourboard.com



STORE YOUR BOARd

3. Use a 5/32" drill bit to drill pilot holes into the wall studs at the marked locations in the previous step. The depth of the hole should be similar to that of the lag screw provided.

4. Slide a machine washer on both wall lag screws. Align the rack with the pilot holes created in the previous step. Fasten the rack to the wall using a socket wrench to drive the wall lag screws into each of the pilot holes.

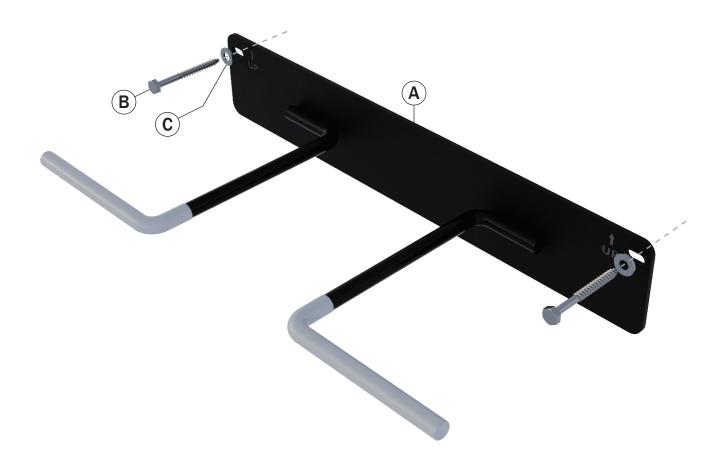



WE HIGHLY VALUE YOUR FEEDBACK! HELP SYB AND OTHER CUSTOMERS BY LEAVING A REVIEW OF YOUR EXPERIENCE.

