

DOUBLE TROUBLE

Model # 22-9935



Cart



Stand

PARTS LIST

Qty	Name
2	Base Frame
2	Base Frame Cross Bar
1	Wheel Base with Axel
2	Loop Frame
1	Top Frame
8	Locking Pin
2	10" Airless Wheel
2	Quick Release Pin
1	Strap

Holds up to 125 LBS

Assemble Double SUP Stand

Step 1: Assemble Stand

Parts Needed: 2 *Base Frames* and 2 *Base Frame Cross Bars*, 4 Locking Pins

1. Insert the *Base Frame Cross Bar* into bracket of *Base Frame*.
2. Line up holes and insert *Locking Pin* and secure on other side.
3. Repeat with 2nd *Base Frame Cross Bar*.



Caution: When closing the Locking Pin, use the palm of your hand to lock it into place.



Rev. 10/18

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350




CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM

Step 2: Assemble Loop Frame for Stand

Parts Needed: 2 *Loop Frames*, 4 *Locking Pins*

The "Stand" sticker faces outward when positioning the Loop Frame. Insert the *Loop Frame* facing inwards onto posts of base as shown. Secure with *Locking Pins*. To align holes you may need to gently tap upwards on the *Loop Frame*.

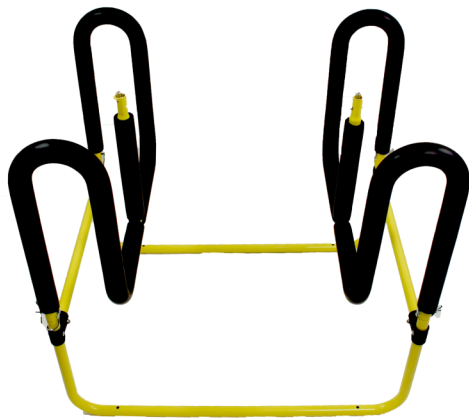

Step 3: Attach Top Frame

Parts Needed: 1 *Top Frame*

Loosely set *Top Frame* on *Loop Frame*. Push in *Push Pins* on both sides of post and snap *Top Frame* into place.



Assemble Double SUP Cart

Step 1: Assemble Loop Frame to Wheel Base

Parts Needed: 4 *Locking Pins*, 2 *Loop Frames* and 1 *Wheel Base*

The "Cart" sticker faces outward when positioning the Loop Frame. Place *Wheel Base* in an upright position. Insert the *Loop Frame* into the posts of the *Wheel Base*. Secure with *Locking Pins*. Please note that if the holes do not line up completely you may need to gently tap upwards on the *Loop Frame* until the holes are fully aligned.



Repeat for 2nd *Loop Frame*.

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM

Step 2: Assemble Top Frame


Parts Needed: 1 *Top Frame*

Loosely set *Top Frame* on *Loop Frame*.
At the same time, push in *Push Pins*
together and snap *Top Frame* into place.



To Secure SUPs

1. Loop *Strap* around frame and top of SUPs.
2. Thread end of *Strap* through buckle.

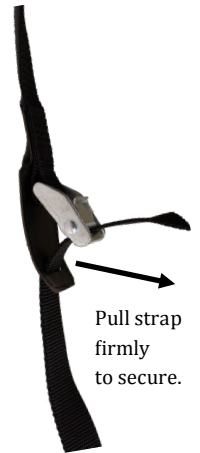

Step 3: Assemble Wheel to Wheel Base

Parts Needed: 2 *Wheels*, 2 *Quick Release Pins*

Slide *Wheels* onto frame and insert *Quick Release Pins* downward into the hole next to the wheel. Flip the locking ring over the end of axle to secure the *Pin*.



FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM



To Convert
Stand to a
Cart:




Stand and Cart are interchangeable by swapping wheel and stand bases.

Rotation of Loop Frame

Caution: When opening the *Locking Pin*, use two fingers to pull the *Locking Pin* open.

1. Remove *Locking Pins*.
2. Lift up to remove *Stand* or *Wheel Base*.
3. While holding top frame, press in on a *Push Pin* then rotate *Loop Frame* 180°.
4. Repeat for the other *Loop Frame*.
5. Use *Locking Pins* to attach frame to either the *Stand Base* or *Wheel Base*.



Note: The outside sticker indicates whether the Loop Frame will fit the Cart or Stand Frame.

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

OUR PLEDGE TO YOU

Suspenz® products are warranted for life against defects in material or workmanship to the original owner. Product must be used for its intended purpose under normal conditions. Please visit www.Suspenz.com for complete warranty information.

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM