




STOREYOUR

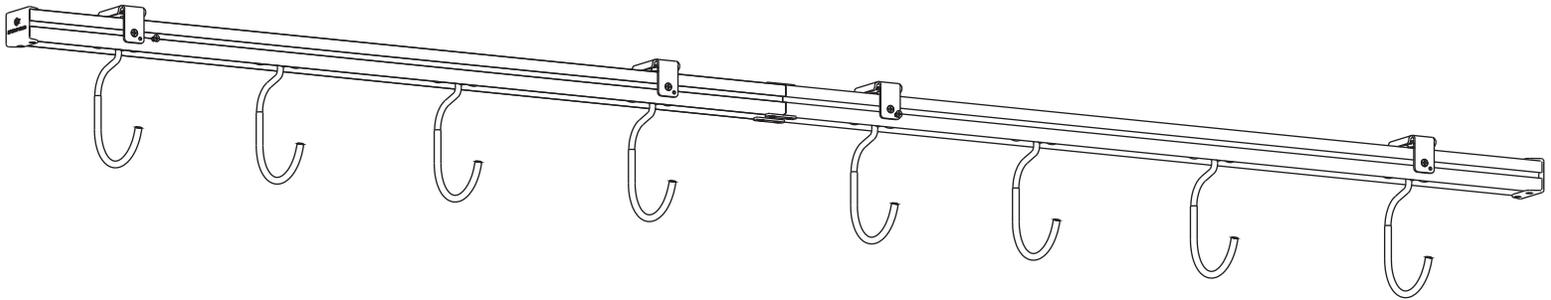

INSTALLATION GUIDE

CYCLESIDE



SCAN THIS QR CODE FOR
THE FULL INSTALL VIDEO.

Questions or Concerns?

Contact us at: 

info@storeyour.com

IMPORTANT INFORMATION

CycleSlide

Manufactured for Spire LLC in China

Quantity: 1

WARNING! The product is NOT intended for use by any person under the age of 18 years old. You must be over the age of 18 to install or use the product.

WARNING! Strictly follow all instructions to avoid an accident, damage to property, personal injury or death.

READ THE ENTIRE USER MANUAL BEFORE INSTALLATION

The User Manual you received with your product provides instructions on how to install and use your product. The instructions are written for a person with a basic understanding of tools and procedures. Read the entire manual before proceeding. If you do not understand any portion of the instructions, do not attempt installation, and email us with the information on the cover.

CORRECTLY INSTALL THE PRODUCT

Read and follow all instructions carefully.

Failure to properly install and use the product could allow the product to dismantle or fall, injuring persons or personal property in the process. Accordingly, it is critical that the product be assembled and installed correctly and according to the instructions in the User Manual.

USE TOOLS SAFELY

The procedures in the User Manual may require climbing ladders and/or operating power tools. Make sure you are familiar with these tools and their safety procedures before attempting to use such tools during installation. Always be aware of electrical wires during installation. Failure to do so could result in an electrical shock or death.

CAUTION

It is the consumer's responsibility to install this system in accordance with all codes, ordinances, and local regulations.

When installing the product, it is the consumer's responsibility to ensure the structural integrity of the structure it is being mounted to.

The product is intended for the storage of sporting equipment only. Do not use it for any other purpose.

This system has a maximum capacity stated in the following section. Overloading the system could result in damage to property or injury.

Use extreme caution when loading and unloading equipment from this system.

It is the consumer's responsibility to ensure that the system is in proper working condition before loading objects onto the system. Check tightness of all bolts and screws periodically. Failure to properly maintain the system could result in damage to property or injury.

WARNING AND DISCLAIMER


Spire LLC (d/b/a StoreYourBoard) expressly disclaims any and all liability for personal injury, property damage or loss, whether direct, indirect, incidental, resulting from the incorrect mounting, improper use, inadequate maintenance, or neglect of this system.

CYCLE SLIDE PARTS

WEIGHT LIMITS: REQUIRED TOOLS:

100 pounds per hook
300 pounds per pair of
brackets
600 pounds total

Drill and Driver
3/16" Drill Bit
7/16" Hex driver
Phillips Head Screwdriver
Stud Finder
Level

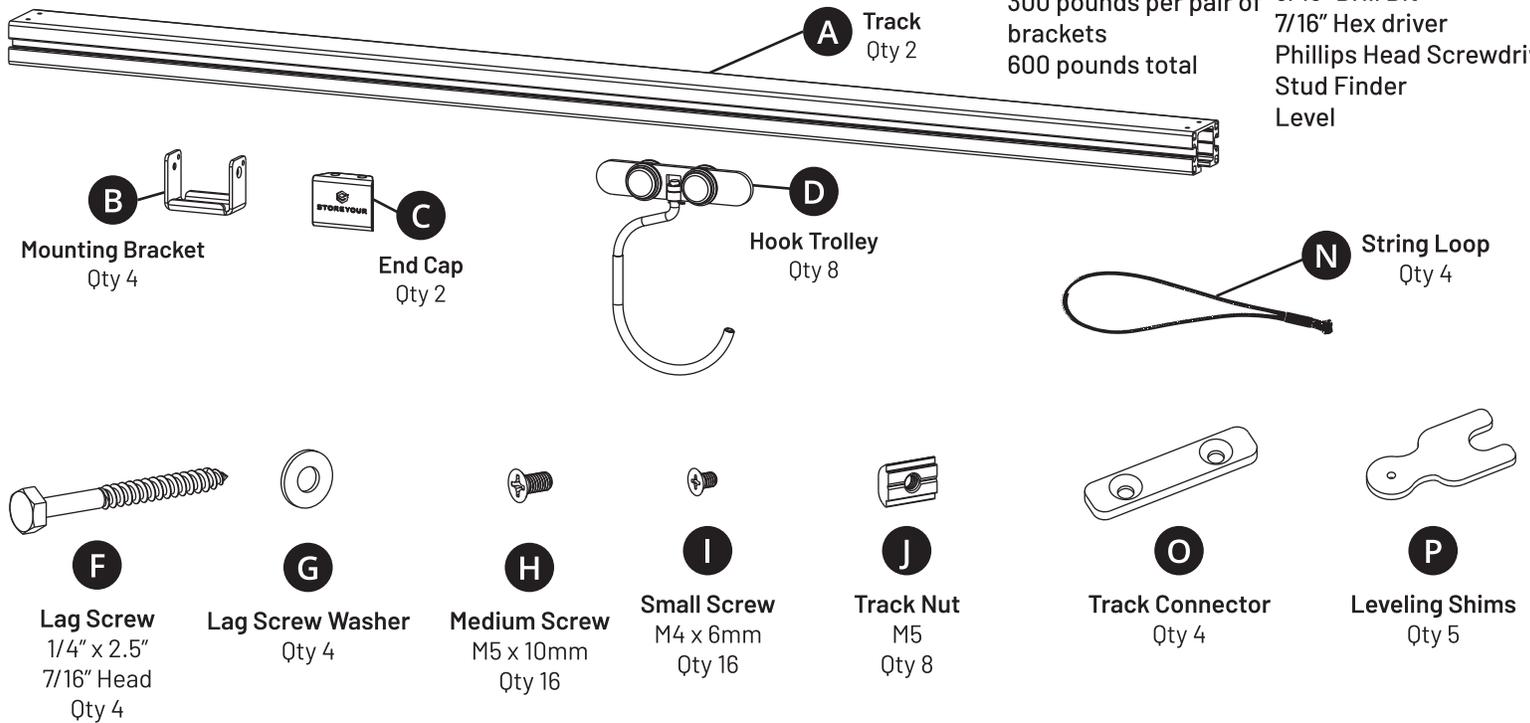

INSTALLATION STEPS

1

PLAN YOUR INSTALLATION

- Includes two 46" tracks → 92" total length when connected
- Measure ceiling height and bike clearance
- Use a stud finder to locate joists

Bracket Spacing


Perpendicular to joists

- 16" joists → brackets 32" apart
- 24" joists → brackets 24" apart
- One pair of brackets per track
- With 16" joists, there will be a 16" gap between inner brackets and the tracks will join in the middle


Parallel to a single joist

- Install all brackets on one joist
- Brackets 32" apart for each track, 16" gap between pairs of brackets


PLAN YOUR INSTALLATION

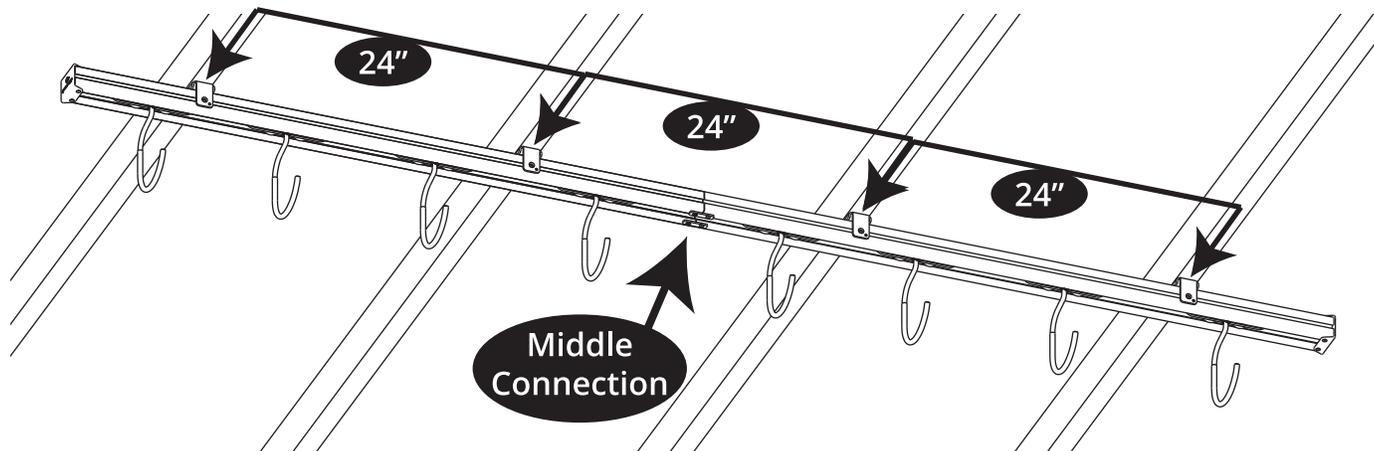

24" Joist Spacing

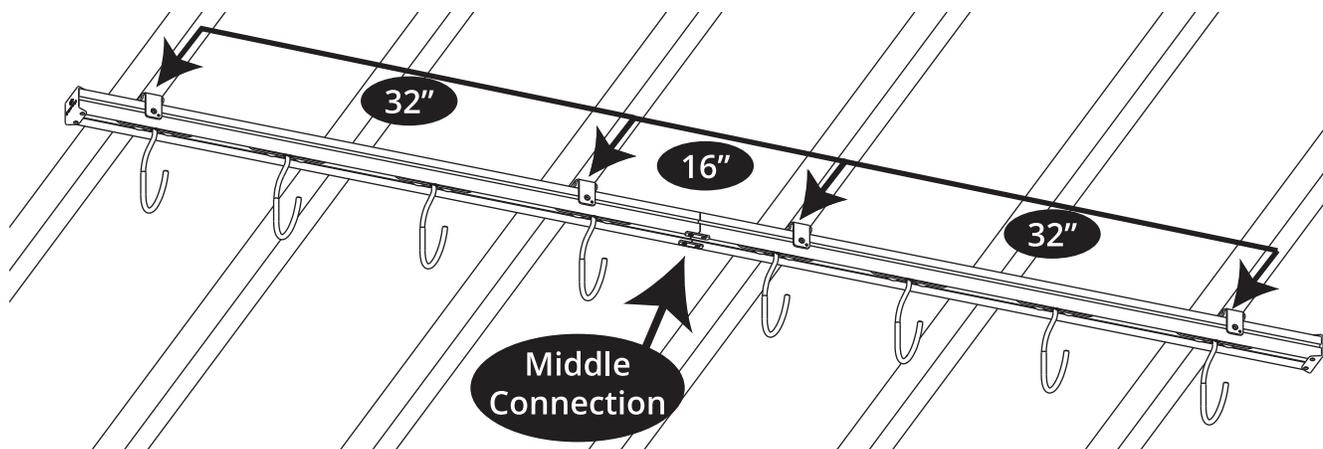

16" Joist Spacing

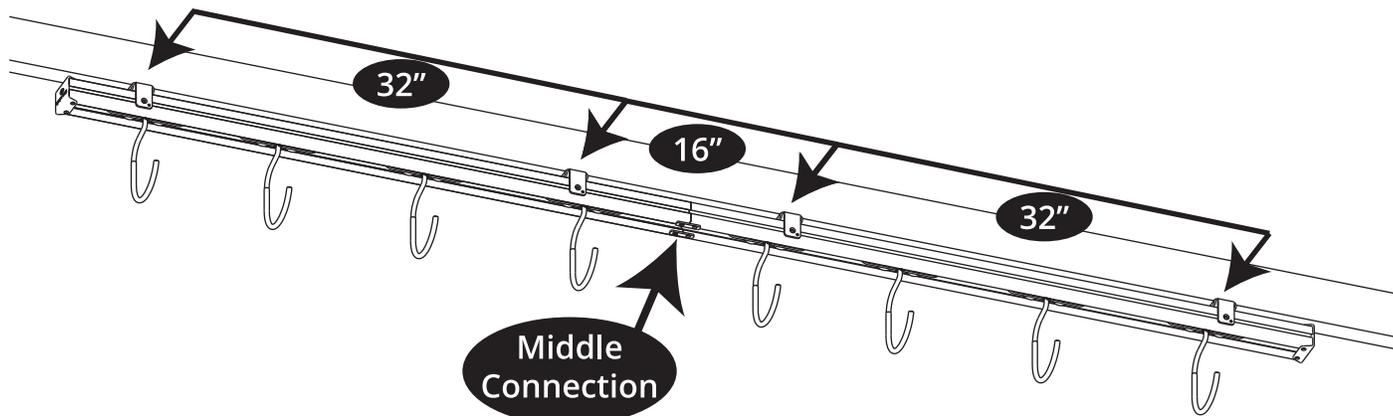


Parallel to Single Joist

2

INSTALL THE BRACKETS


1. Mark and drill pilot holes with a 3/16" drill bit in the joists at your chosen spacing.
2. Secure each Mounting Bracket (B) using Lag Screws (F) and washers (G).
3. Hold the track in place to confirm both brackets are aligned.
4. Once aligned, fully tighten all screws.

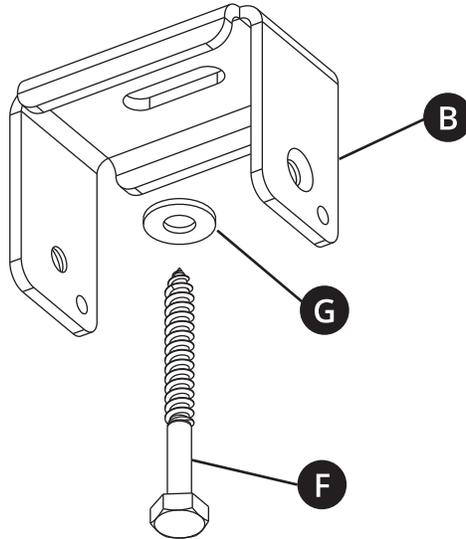

3


CONNECT THE TRACKS

1. Align the ends of the two tracks on a flat surface.
2. Use 4× Track Connectors (O) and 8× Small Screws (I) to connect the track ends.
3. Tighten securely, ensuring the tracks are straight and flush.

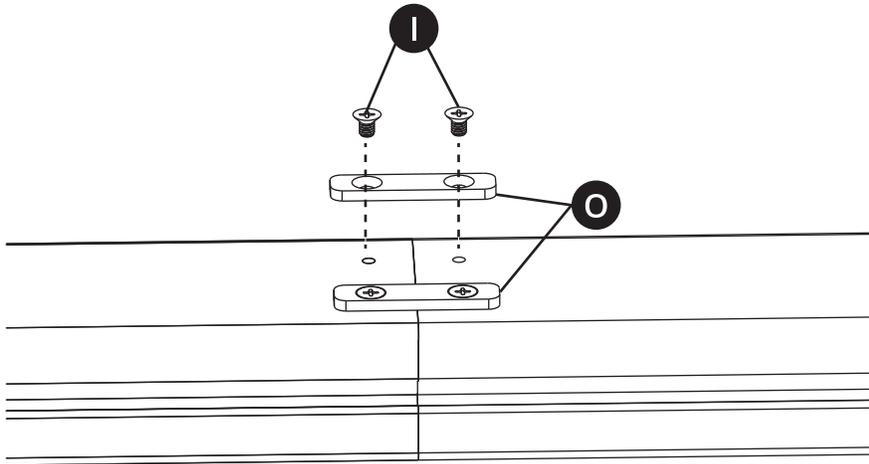


INSTALL THE TRACK ASSEMBLY

1. Insert 2 Medium Screws (H) into the threaded side holes of each Mounting Bracket (B).
2. Hold the connected Tracks (A) inside the Mounting Brackets (B) and connect a String Loop (N) between the screws to temporarily support the tracks.
3. Slide Track Nuts (J) down the channel in the side of the track until they align with the Mounting Bracket holes.
4. Use a Phillips head screwdriver to position the nuts and attach using Medium Screws (H) (leave slightly loose).
5. Once all four are connected, remove the string and the screws they were hanging from, center the track, and tighten all screws.

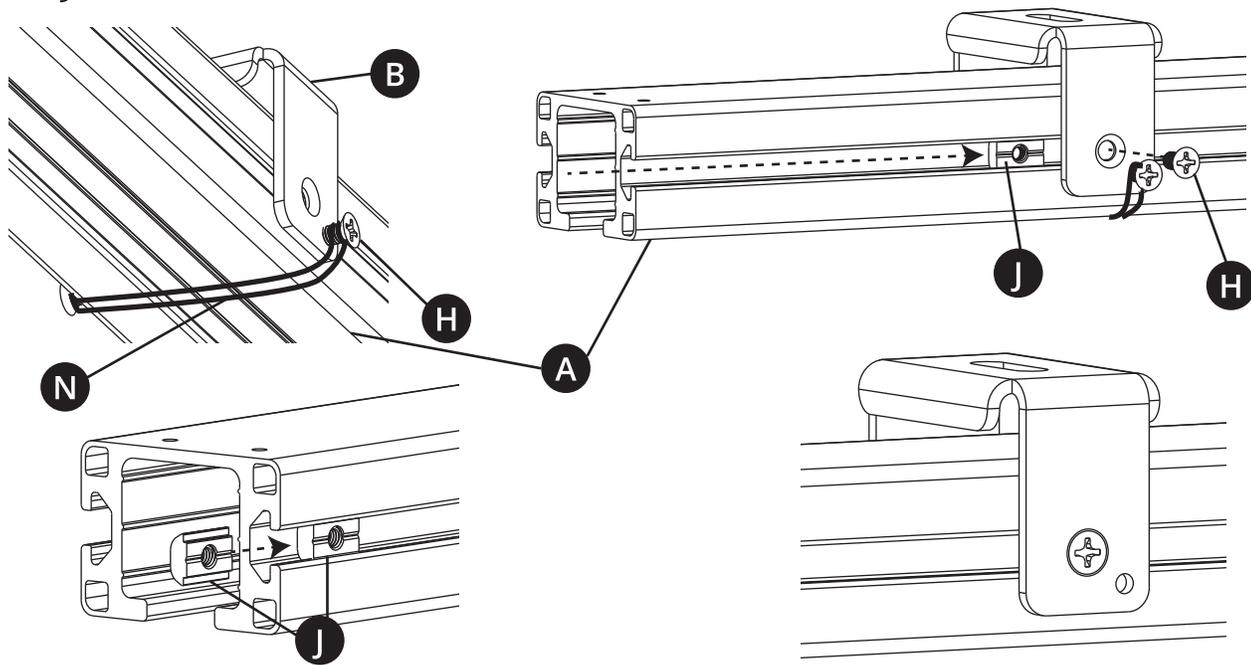

NOTE: If your mounting surface is not level, add Shims (P) between the Mounting Bracket and mounting surface on the brackets that don't stick down as far as the others. Loosen the Lag Screw enough to install the shims, then re-tighten after checking the tracks can be installed.

It is recommended not to use more than 3 shims per bracket. If you need more than 3 shims per bracket then you need to mount a level board to your mounting surface and then connect the brackets to that board, still in the joist locations for full thread engagement.

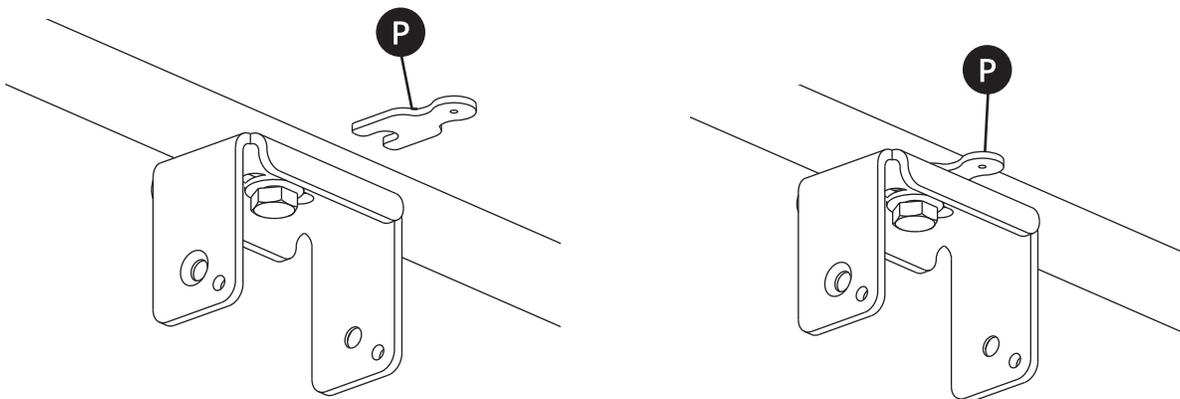


5

FINISH INSTALLATION

Note:

For ceiling installations, you will typically only be able to access the bottom screws on the end caps. This is normal and acceptable.

1. Attach one end cap using 2× Small Screws (I).
2. Slide the Hook Trolleys (D) into the open end of the track.
3. Attach the second end cap using 2× Small Screws (I).

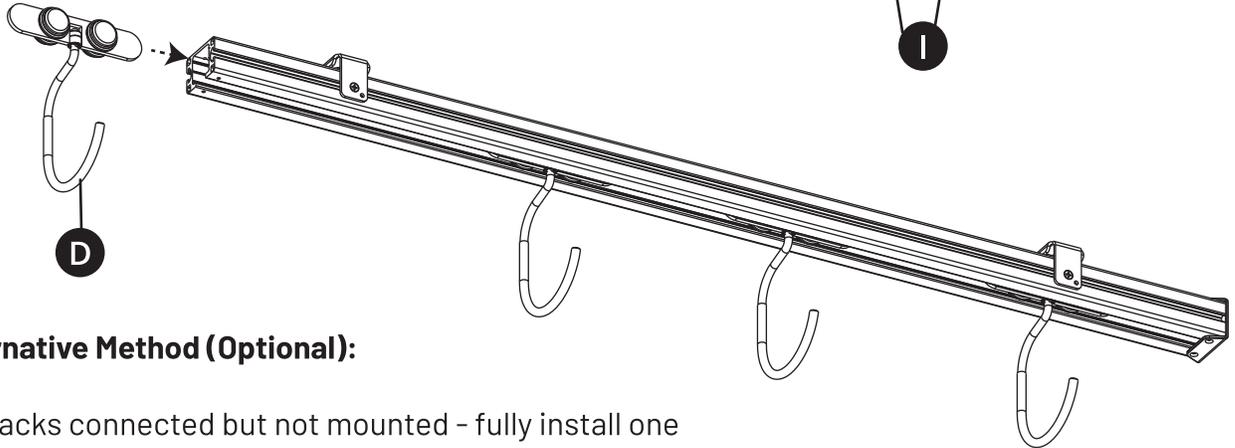

Alternative Method (Optional):

- With the tracks connected but not mounted - fully install one end cap with all 4 screws
- Slide all hook trolleys onto the track
- Install the second end cap
- Lift the full assembly into the ceiling brackets and install

6

LOAD BIKES

- Tighten all screws securely.
- Load bikes by hanging wheels from hooks.
- Rotate and slide the bikes to load, unload, and store as needed

