

SPAREHAND® paddlesports Display and Storage System

PS-41L Single SUP Dual Angle Wall Rack

Caution – Failure to follow these guidelines can result in property damage or personal injury.

- Parts are not labeled. Before assembly, please identify each part according to the descriptions and diagrams below.
- Do not use if the product or any parts is defective.
- . Do not tilt or lift the storage rack.
- Do not drop SUP, Surfboard or any object on the rack. Place objects carefully and slowly.
- . Do not step, stand, or climb on the storage unit.
- Do not use if loads are not balanced and / or cannot be used on level and secure ground. Always make sure the rack will not tip over. Secure the rack to the wall or floor if necessary.
- Use only if you determine the rack can be used safely.
- The manufacture and its agents are not responsible for any damages or injuries caused by the use or misuse of the product.
- Please follow the instructions and observe weight and size limits. 80 Lbs and 16 feet product length total maximum load. Load and size limits are per pair of cradles.
- Max weight varies depending on your wall and mounting method. In some situations, the max weight may be significantly lower.
- · When moving the storage rack, remove all objects from the rack.
- For technical support or questions regarding this product, please contact 626-338-8998. PST 9:00 AM to 3:00 PM.

Parts List PS-41L

The following parts are for each set of PS-41L Double SUP Rack

- A. Vertical Wall Tube (2 PCS)
- B. Padded "Dual Angle" Cradle arms (2 PCS)

Hardware:

W: Long screw M6 x 80 mm (2 PCS) X: Short Screw (2 pcs)


Installation Procedure:

- Step 1. Locate Wall Stand
- Step 2. Mount Part A to the wall and screw in with Short Screw (x) and long screws (W)


 The screw must go thru Part A (Flat side must be toward the wall)
 Screws must be secured to stud.

 Do not install in Hollow walls
- Step 3. Install 2nd wall unit with proper spacing according to the gears to be stored.
- Step 4. Align and install Part B to Part A
- Step 5. **Dual Angle**: Rotate part B to get different angle application. Remove Cradle Arm, rotate to change angle, and re-insert cradle arm.
- Step 6. Use appropriate anchors when installing on block wall or brick walls.
- Step 7. Use foam tape to protect as necessary.

This product may be used for, Paddle Board (SUP), Surfboard, Skis, Snowboard, Water Skis and other similar devices.

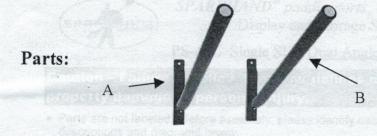


Installation:



SPAREHAND® Systems, USA Tel: 626-338-8998 www.sparehand.net info@sparehand.net

Packaged and Printed in USA

Dual Angle Application

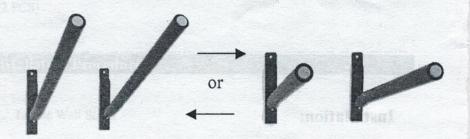

The entiretal in Hollow walls?

Steer 4. Align and Light Part (Law P. L.)

enn i Cresi Ameler Retain part if en get différent année application. Planta Retaine Crasile Anna Pagnetto champa année, que resintent crasile a

astro of the approximate engines were appearable on block wall or bries, we

This product may be seen for Fredch Mosel Inches for the Walland

Surficard, Rull and Surficing Property and early and analytical www.