

### THANK YOU FOR YOUR PURCHASE!

## **WARNING!**

It is the user's responsibility to ensure the safe and proper use of this product. StoreYourBoard is not responsible for damages and injuries related to installation or use, including improper or inadequate mounting. Wear eye protection and locate electrical wiring in walls prior to installation. Not intended for children.

Misuse of this product could result in serious injury or death.


#### PLEASE READ ALL INSTRUCTIONS BEFORE PRODUCT INSTALLATION

#### **INCLUDES:**

- 1 Wall Rack
- 2 Wall Lag Screws
- 2 Machine Washers

# WEIGHT LIMITS:

50 lbs. max per unit

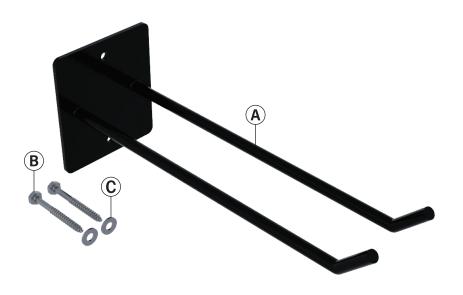

#### **RECOMMENDED TOOLS**

Drill/driver

Drill bits

Socket Wrench

Level

Tape measure

Pencil

Stud finder

#### PART IDENTIFICATION

- A) Wall Rack
- B) Wall Lag Screws
- C) Machine Washers
- 1. Use a stud finder to locate the nearest stud on the wall you wish to install the rack on. Mark the stud location with a pencil.
- 2. Hold the rack up to the wall at the desired mounting height. Align the mounting holes with the stud locations marked in the previous step. Use a level to ensure the rack is evenly balanced horizontally. Once balanced, mark both mounting hole locations with a pencil.

**NEED HELP?** 

WE HIGHLY VALUE YOUR FEEDBACK! HELP SYB AND OTHER CUSTOMERS BY LEAVING A REVIEW OF YOUR EXPERIENCE.







- **3.** Use a 3/16" drill bit to drill pilot holes into the wall stud at the marked locations in the previous step. The depth of the hole should be similar to that of the screw provided.
- **4.** Slide a machine washer on both wall lag screws. Align the rack with the pilot holes created in the previous step. Starting on the top mounting hole, fasten the rack to the wall using a socket wrench to drive the wall lag screws into each of the pilot holes.

