

INSTALLATION GUIDE

XSR RACK



SCAN THIS QR CODE FOR
THE FULL INSTALL VIDEO.

IMPORTANT INFORMATION

XSR Rack

Manufactured for Spire LLC by Yongkang in China

Quantity: 1

WARNING! The XSR Rack is NOT intended for use by any person under the age of 18 years old. You must be over the age of 18 to install or use the XSR Rack.

WARNING! Strictly follow all instructions to avoid an accident, damage to property, personal injury or death.

WARNING! Do not use this product for human suspension. Components can fail causing person to fall, possibly resulting in serious injury or death.

WARNING! When operating system, make sure the area below object is clear of persons. If object comes down too quickly, this can cause an accident.

READ THE ENTIRE USER MANUAL BEFORE INSTALLATION

The User Manual you received with your XSR Rack provides instructions on how to install and use your XSR Rack. The instructions are written for a person with a basic understanding of tools and procedures. Read the entire manual before proceeding. If you do not understand any portion of the instructions, do not attempt installation, and email info@storeyourboard.com

CORRECTLY INSTALL THE PRODUCT

Read and follow all instructions carefully.

Failure to properly install and use the XSR Rack could allow the product to detach from the wall, injuring persons or personal property in the process. Accordingly, it is critical that the XSR Rack be installed correctly and according to the instructions in the User Manual.

USE TOOLS SAFELY

The procedures in the User Manual may require climbing ladders and/or operating power tools. Make sure you are familiar with these tools and their safety procedures before attempting to use such tools during installation. Always be aware of electrical wires during installation. Failure to do so could result in an electrical shock or death.

WARNING!

Contact with wires can give you a severe electrical shock, which may cause injury or death. If you do not know where wires are, have the work done by an experienced professional.

IMPORTANT INFORMATION

CAUTION

It is the consumer's responsibility to install this system in accordance with all codes, ordinances, and local regulations.

When installing the XSR Rack, it is the consumer's responsibility to ensure the structural integrity of the structure it is being mounted to.

The XSR Rack is intended for the storage of sports equipment only. Do not use it for any other purpose.

This system has a maximum capacity of 100 lbs per unit. Overloading the system could result in damage to property or injury.

Use extreme caution when loading and unloading equipment from this system.


It is the consumer's responsibility to ensure that the system is in proper working condition before loading objects onto the system. Check tightness of all bolts and screws periodically. Failure to properly maintain the system could result in damage to property or injury.

WARNING AND DISCLAIMER


Spire LLC (d/b/a StoreYourBoard) expressly disclaims any and all liability for personal injury, property damage or loss, whether direct, indirect, incidental, resulting from the incorrect mounting, improper use, inadequate maintenance, or neglect of this system.

INSTALLATION

NOTE: The XSR Rack must be mounted to studs.

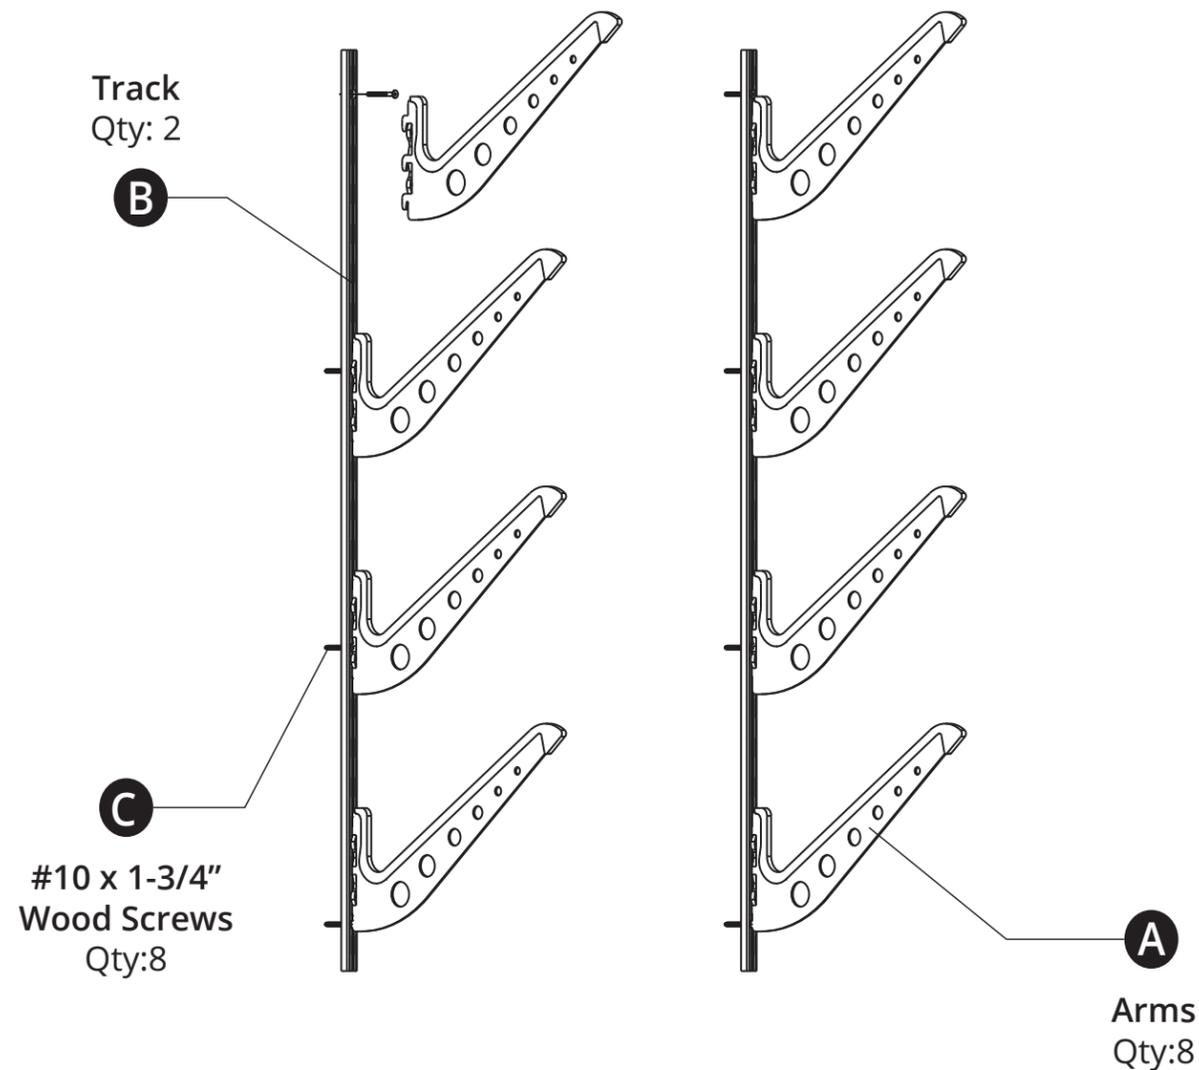

- 1 Decide where to mount your XSR and locate the closest studs. You must mount the XSR into the studs. Use a Stud Finder to locate your wall studs, which are typically spaced 16" apart.
- 2 Place the first Track (B) against the wall in your desired location. Decide the mounting height of the Track, keeping in mind the reach required to load and unload the XSR's top level. Mark the bottom of the Track. Use a level to plumb the Track straight up and down. Mark the Track's 4 mounting holes on the wall.
- 3 Align the Track with your marks. Start at the top and secure the provided screw (C) through the Track's top mounting hole. By leaving the screw slightly loose, gravity will help level your Track vertically. Check the marks you made for the remaining 3 mounting holes and adjust as needed to make level. Then secure the rest of the Track to the wall with the 3 remaining screws.
- 4 Repeat mounting process for the second Track. Mount at the same height as the first Track to ensure your boards and gear will be stored on a level surface.
- 5 4 Arms (A) are provided for each Track (B), which can be inserted into any slot along the Track. Decide the spacing between Arm levels based on the boards and gear you will be storing (for example, boards with high bindings or large fins require additional clearance.) Insert the Arms into both Tracks.

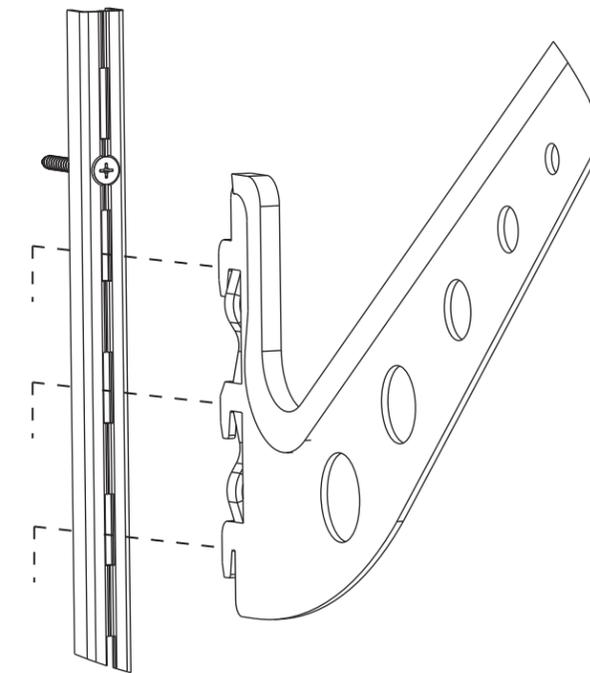

RECOMMENDED TOOLS:

Drill/Phillips Screwdriver
Phillips Driver
Level
Pencil
Stud finder

WEIGHT LIMITS:

100 lbs

PRODUCT OVERVIEW:

The XSR Rack is an adjustable wall mount storage rack for surfboards, wakeboards, skis and more.

- 6 Once you are happy with the spacing of the Arms (A), and you confirm the line up between both Tracks, use a hammer or rubber mallet and gently tap down on the top of the base of each Arm to properly seat the Arms into each slot and reduce "wiggle". Once inserted, the Arms are removable again so you can adjust their spacing as needed.